

Hybrilux

SL15-MAX SOLAR FIN

All-in-One Solar fully integrated LED Street Light

A full range series of solar street luminaires with maximum flexibility.



200 lm/W




Up to 21% high conversion rate



LifePO4




Sustainable

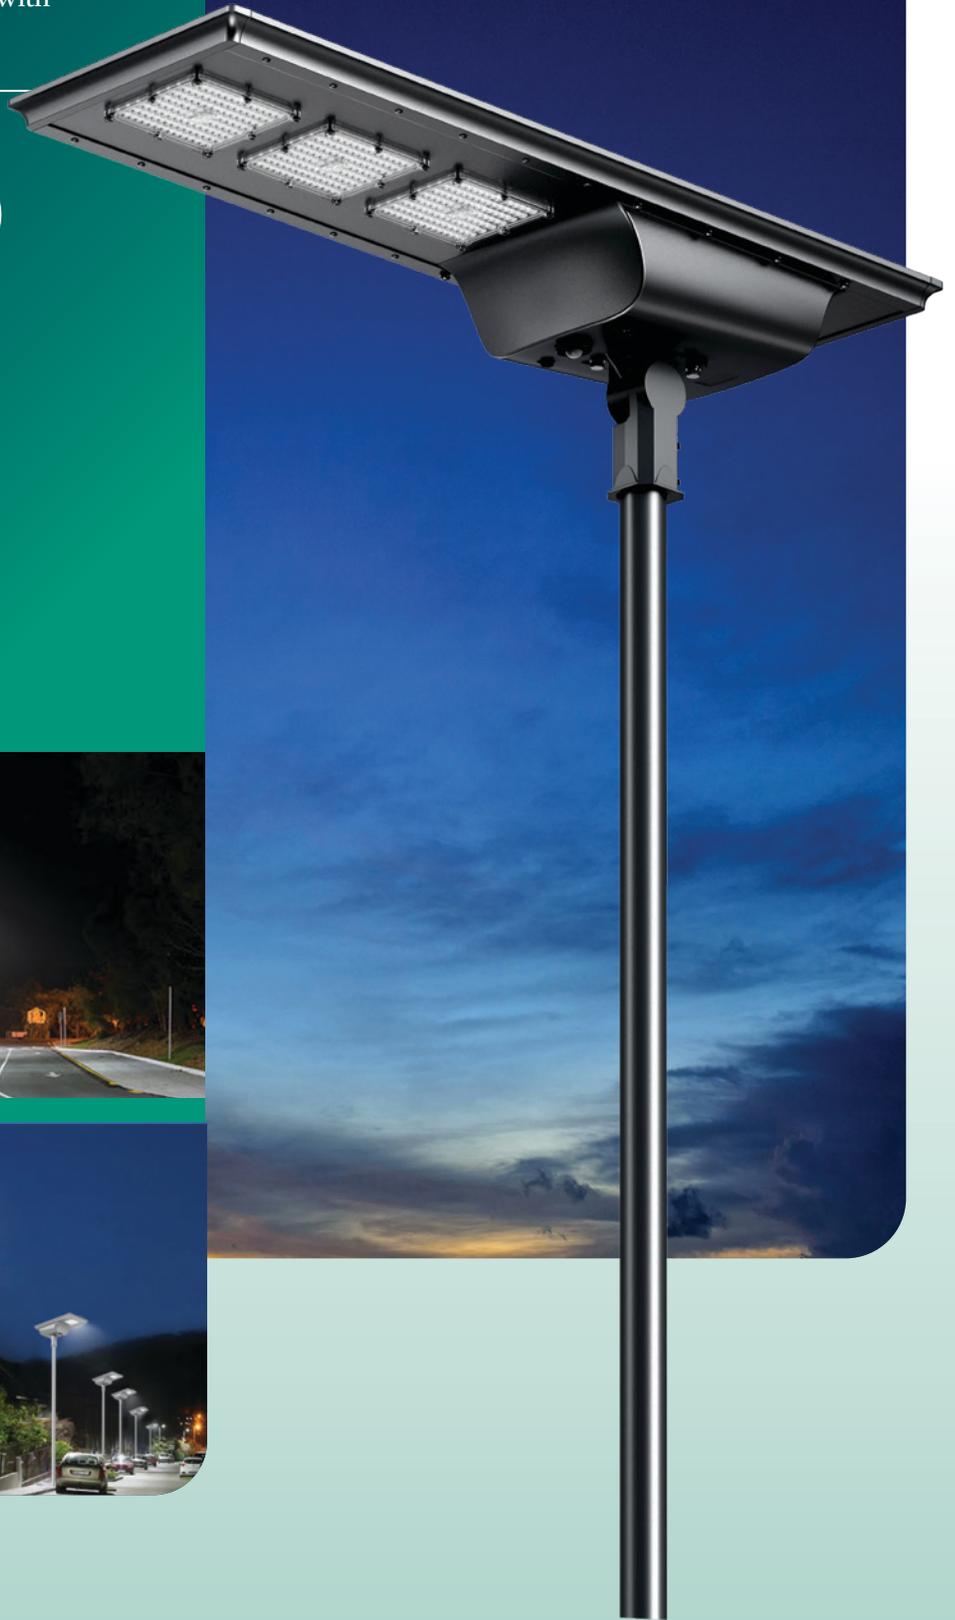

Built for Efficiency & Overall Value.

Its All-in-One integrated design simplifies installation — eliminating the need for wiring — while reducing both operational and freight costs.

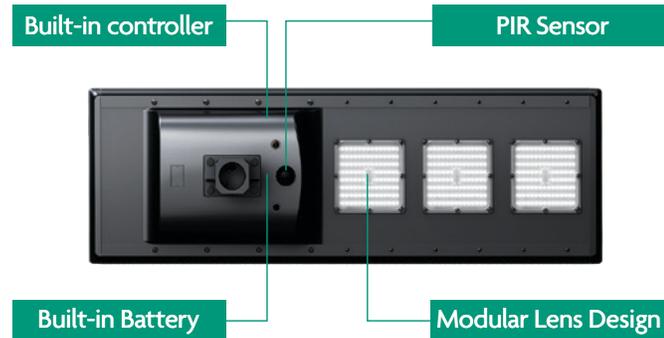


Mono-crystalline photovoltaic panel with a higher conversion efficiency

The battery and controller are seamlessly integrated within the fixture, making transportation and installation quick and effortless. This solar street light features a high-performance LiFePO₄ battery, delivering superior high-temperature resistance, strong current discharge, and a lifespan of over 2,000 charge cycles. A 21% high-efficiency monocrystalline solar panel maximizes energy capture—even in rainy or low-light conditions—ensuring longer service life and consistently reliable lighting performance. With just 8 hours of charging, the system can operate continuously for up to three days



High Efficiency Up To 200lm/w.

Engineered for performance, the system delivers up to 200 lm/W efficiency — providing maximum light output with minimal energy consumption. Available from 6,000 to 20,000 lumens, it meets the demands of projects large and small.



All-in-One Solar Lighting: Delivering Efficient Illumination in a Sleek, Easy-to-Install Design That Reduces Shipping and Installation Costs.

Single-unit architecture integrates the solar panel, luminaire, and battery enclosure, optimizing system efficiency and structural simplicity.



All-in-One design saves in shipping costs by reducing the numbers of boxes per fixture.



Compare our light with a traditional solar street with an external panel.

Traditional solar street lights can be bulky and visually unappealing. They typically rely on external solar panels, separate intelligent controllers, and lead-acid batteries, resulting in a more complex design that drives up installation and shipping costs.


Low Maintenance. Long-Term Savings.

Maximize energy savings and minimize maintenance costs with our solar street light featuring an intelligent PIR motion sensor. This smart system automatically adjusts brightness based on movement, ensuring ultra-low energy consumption and extended battery life. Enjoy powerful, consistent illumination with long-lasting performance — no maintenance required.

Maintenance Friendly

Housing contains a large space to fit different capacity of batteries.

Detachable LiFePO4 battery makes it easy for maintenance.

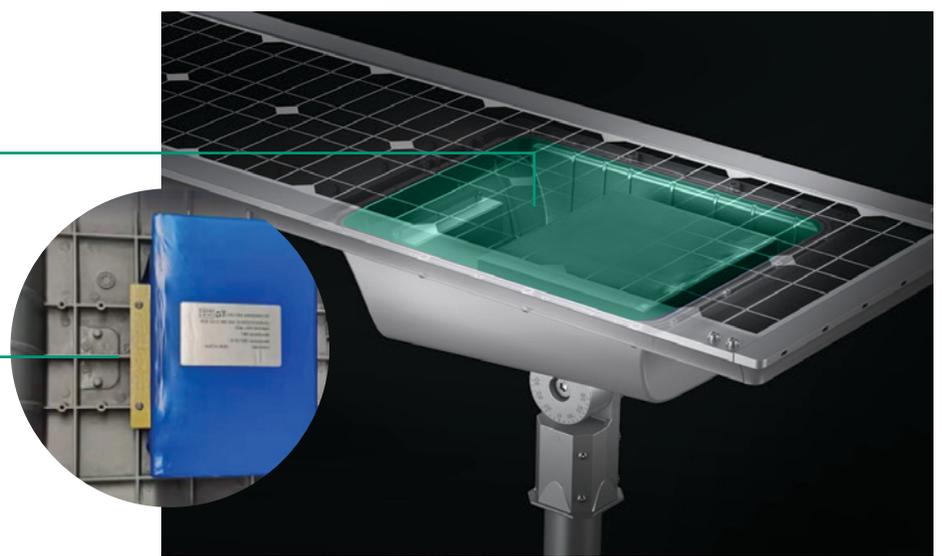

Flexible Installation

The SL15 fixture line delivers up to around eighty degrees of adjustability, offering enhanced design flexibility and a more efficient installation process.





Electrical Information						
Model No.	SL15-30	SL15-40	SL15-50	SL15-60	SL15-80	SL15-100
Power Consumption (±5%)	30W	40W	50W	60W	80W	100W
Battery	LiFePO4 battery					
Battery Capacity	230.4WH	307.2WH	384WH	460.8WH	614.4WH	768WH
Solar Panels	Mono-crystalline solar panel					
Solar Panel Wattage	45W	63W		80W		90W
Charging Time	>9 hours					
Operating Time	Normal mode with 100% brightness>8hours, Intelligent mode 3-4 days					
Solar Charge Controller	MPPT					
Working Mode	Refer Intelligent control					
Control	Timmer dimming/PIR sensor					

Optic Information						
LED Type	LED 2835					
Lumious Flux (±10%)	6000lm	8000lm	10000lm	12000lm	16000lm	20000lm
Efficacy (4000K Ra70)	200lm/W					
Correlated Color Temperature	4000K (3000K, 5000K optional)					
Color Rendering Index	Ra70 (Ra80 optional)					
Beam Angle	R10801, R10803, R10805					
UGR Level	NA					

Description

SL15-Max Solar Fin is a full range integrated solar street light, four sizes covering 30W, 40W, 50W, 60W, 80W, 100W, will satisfy different applications. The cutting edge structure design and flexible mounting angle contribute to an easy installation. The built-in PIR sensor supports intelligent dimming control and offer longer discharge time. SL15-Max, the easy, clean and long working period street light.

Key Features

- Full wattages, 30W, 40W, 50W, 60W, 80W, 100W.
- High system efficiency up to 200lm/w, lumen package from 6000lm to 20000lm
- Smart control with built-in PIR sensor and timer dimming.
- Higher conversion Mono-crystalline photovoltaic solar panel.
- Easy maintenance with removable battery.
- ±80° adjustable mounting angle

Dimensions and Mount

Product Dimension	796x422x342mm	1100x422x342mm		1282x422x342mm		1532x422x342mm
Luminaire Net Weight (±0.3kg)	13.5	16.5	17.0	20.0	21.5	24.0
Export Carton Size	910x530x255mm	1225x530x255mm		1405x530x255mm		1655x530x255mm
Gross Weight (±0.3kg)	15.8	19.5	20.1	23.1	24.7	27.6
Mounting Option	Post top mounting					
Material	Aluminum alloy					
	Polycarbonate optical lens					
	LiFePO4 battery					
	Mono-Crystalline solar panel					
Finish	Powder coating					
Fixture Color	Silver					
EPA	0.403m ² (4.34ft ²)	0.557m ² (6ft ²)		0.649m ² (6.99ft ²)		0.776m ² (8.35ft ²)
IP Rating	IP65					
Category of corrosion	C3					

Lifespan and Warranty

Operating Temperature	0°C to + 50°C					
Life Time of LED @Ta=25°C	31000hrs-L90					
	64000hrs-L80					
	101000hrs-L70					
Warranty	Battery	3 Years				
	Other accessories	5 Years				



Applications

- Village streets
- Urban road
- Courtyard
- Parking lot
- Walk path
- Park


New Features

* Please consult us for details.


Dimensions

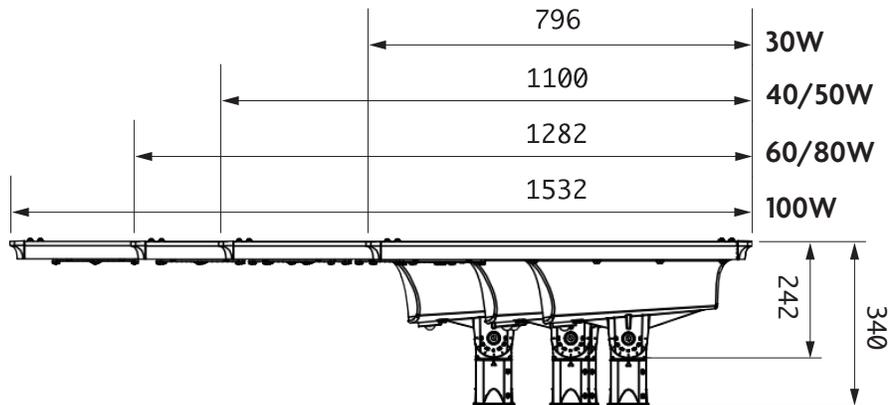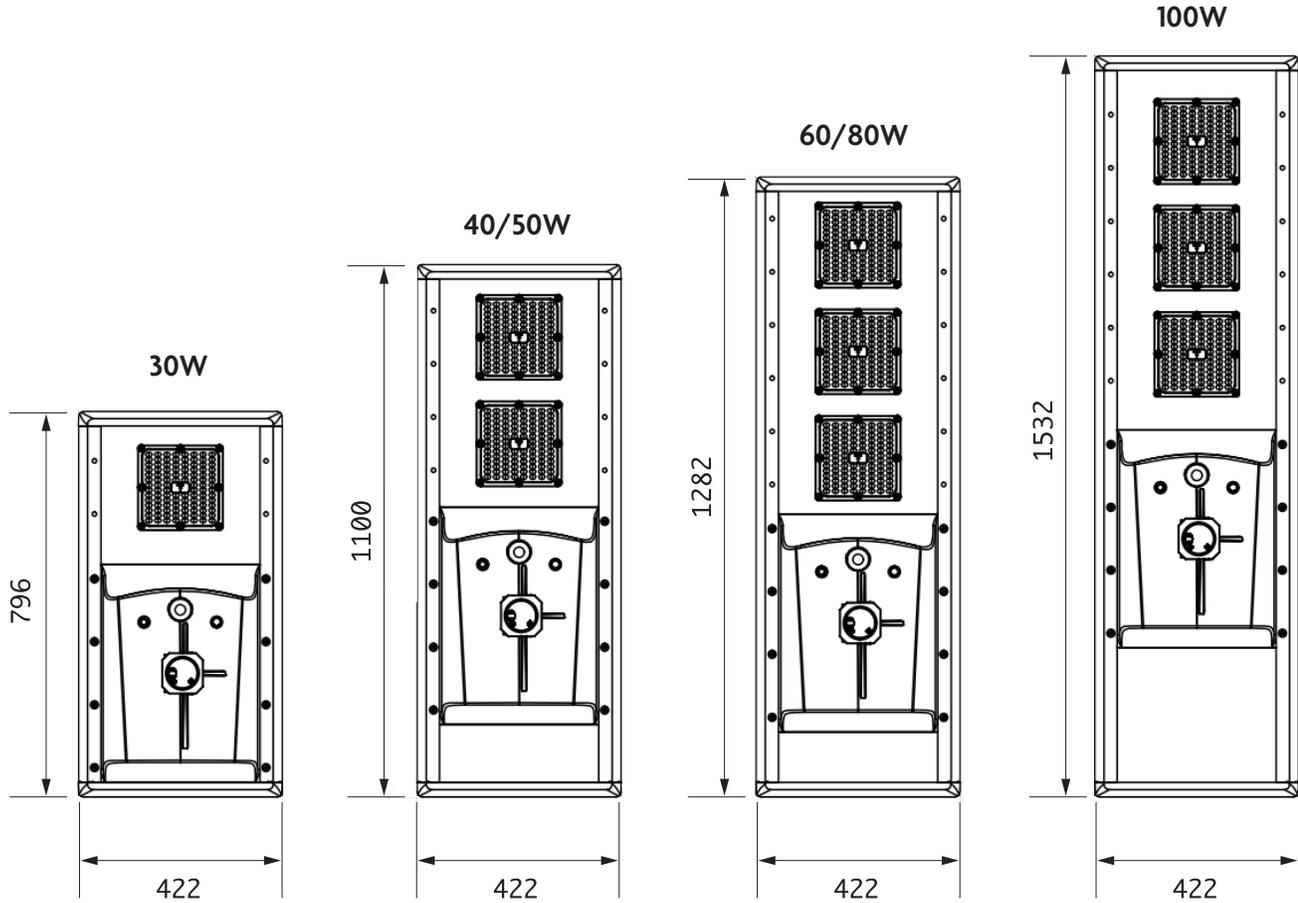


Photometry



R10801



R10803



R10805



Mounting Options



Post Top Mount

Intelligent Control Mode

5 Stage Night Mode

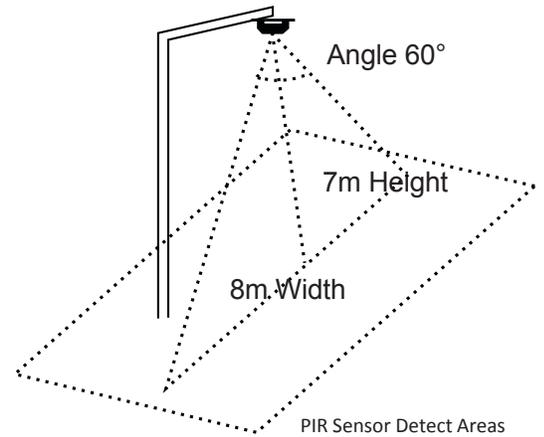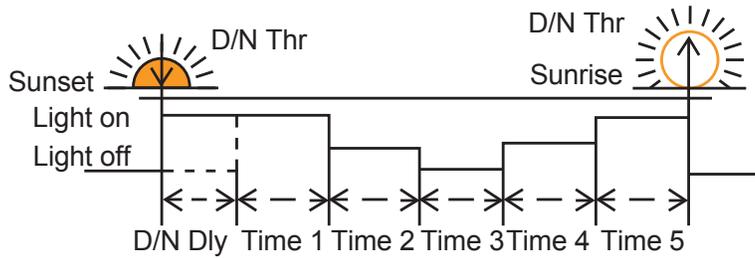

*You can note the Sensor function is only available at Time 3 and Time 4

*Please note the fixtures with 5 stages timer dimming yourself by the remote controller.

Factory Default setting




With sufficient natural light, the light keeps charging.



The light keeps 100% brightness for 0.5 hour.



The light keeps 50% brightness when presence is detected in the 1st 4 hours.



The light keeps 10% brightness when no presence is detected after 30S hold time in the 1st 4 hours.



The light keeps 20% brightness when presence is detected in the 2nd 4 hours.



The light keeps 10% brightness when no presence is detected after 30S hold time in the 2nd 4 hours.



The light keeps 10% brightness for 3 hours until sunrise.

The Controller recognizes day and night based on the Solar Array Open Circuit Voltage, this day/night threshold can be modified according to local light conditions and the Solar Array Used, setting range 3.0 ~8.0V

Accessories



Optic lens

High transmittance PC materials, UV test approval.



Pole mount spigot

ADC12 materials, 15 tilt adjustable, for dia.34/42/ 60/ 76mm pole




Pole clam bracket

SPCC materials with outdoor powder coating, can be also the wall mount bracket



Wall mount adaptor

Q235+SPCC materials with outdoor powder coating.



T shape pole mount adaptor

Q235 with Akzo Powder Coating materials, for 100x100mm square pole.



T shape pole mount adaptor

Q235 materials for 60/76mm diameter pole.



L shape pole mount adaptor

Q235 materials, for 100X100mm square pole.



L shape pole mount adaptor

SPCC materials, for 90mm diameter pole.



Remote Controller

Remote Controller for Solar Street light.



L shape pole mount adaptor

SPCC materials, for 60mm diameter pole.